

# Structural Blind Rivet FERRO®-BULB




d	l <sub>max</sub>		d <sub>k</sub>	k	d <sub>m</sub>	No.	
<b>4,8</b>	9,0	1,5 - 3,5	9,6	1,5	3,1	10.792.048.090	500
4,9 - 5,1 mm  3600 N  3800 N							
<b>4,8</b>	11,5	3,5 - 6,0	9,6	1,5	3,1	10.792.048.115	500
4,9 - 5,1 mm  4200 N  3800 N							
<b>4,8</b>	14,5	6,0 - 8,5	9,6	1,5	3,1	10.792.048.145	250
4,9 - 5,1 mm  5600 N  3800 N							
<b>6,4</b>	9,0	1,5 - 3,5	13,4	2,7	3,9	10.792.064.090	250
6,7 - 6,9 mm  10000 N  7800 N							
<b>6,4</b>	10,5	2,8 - 4,8	13,4	2,7	3,9	10.792.064.105	250
6,7 - 6,9 mm  11000 N  7800 N							

d	l <sub>+1</sub>		d <sub>k</sub>	k	d <sub>m</sub>	No.	
<b>6,4</b>	12,5	4,8 - 6,8	13,4	2,7	3,9	10.792.064.125	250
6,7 - 6,9 mm  12500 N  7800 N							
<b>6,4</b>	14,5	6,8 - 8,8	13,4	2,7	3,9	10.792.064.145	250
6,7 - 6,9 mm  13000 N  7800 N							
<b>6,4</b>	16,5	8,8 - 10,8	13,4	2,7	3,9	10.792.064.165	250
6,7 - 6,9 mm  14500 N  7800 N							
<b>6,4</b>	18,5	10,8 - 12,8	13,4	2,7	3,9	10.792.064.185	250
6,7 - 6,9 mm  15000 N  7800 N							

Countersunk head available on request from stock.

FERRO®-BULB

# Structural Blind Rivet FERRO®-BULB

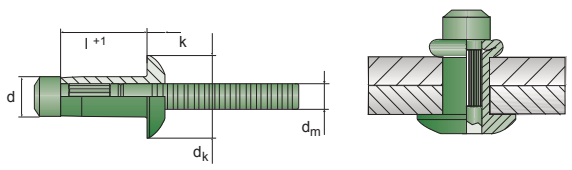

**Stainless Steel / Stainless Steel**  
**Dome Head - open-**

d	l <sub>+1</sub>		d <sub>k</sub>	k	d <sub>m</sub>	No.	
<b>3,2</b>	7,0	1,0 - 3,0	6,6	1,1	2,1	10.791.032.070	500
3,3 - 3,4 mm  1600 N  2000 N							
<b>3,2</b>	9,5	3,0 - 5,0	6,6	1,1	2,1	10.791.032.095	500
3,3 - 3,4 mm  1700 N  2000 N							
<b>3,2</b>	11,5	5,0 - 7,0	6,6	1,1	2,1	10.791.032.115	500
3,3 - 3,4 mm  3200 N  2000 N							
<b>4,0</b>	7,5	1,0 - 3,0	8,0	1,5	2,6	10.791.040.075	500
	10,0	3,0 - 5,0				10.791.040.100	500
	12,5	5,0 - 7,0				10.791.040.125	500
4,1 - 4,3 mm  5200 N  4000 N							
<b>4,8</b>	10,0	1,5 - 3,5	9,6	1,5	3,2	10.791.048.100	500
	12,5	3,5 - 6,0				10.791.048.125	500
	15,5	6,0 - 8,5				10.791.048.155	250
4,9 - 5,1 mm  5500 N  5000 N							

d	l <sub>+1</sub>		d <sub>k</sub>	k	d <sub>m</sub>	No.	
<b>6,4</b>	9,0	1,5 - 3,5	13,4	2,7	3,9	10.791.064.090	250
6,7 - 6,9 mm  11000 N  8800 N							
<b>6,4</b>	10,5	2,8 - 4,8	13,4	2,7	3,9	10.791.064.105	250
6,7 - 6,9 mm  11500 N  8800 N							
<b>6,4</b>	12,5	4,8 - 6,8	13,4	2,7	3,9	10.791.064.125	250
6,7 - 6,9 mm  12500 N  8800 N							
<b>6,4</b>	14,5	6,8 - 8,8	13,4	2,7	3,9	10.791.064.145	250
6,7 - 6,9 mm  13000 N  8800 N							
<b>6,4</b>	16,5	8,8 - 10,8	13,4	2,7	3,9	10.791.064.165	250
6,7 - 6,9 mm  14000 N  8800 N							
<b>6,4</b>	18,5	10,8 - 12,8	13,4	2,7	3,9	10.791.064.185	250
6,7 - 6,9 mm  15000 N  8800 N							

For an optimized processing of our structural FERRO®-BULB blind rivets the pneumatic-hydraulic tool **BZ 133A** is available on request. This tool offers a **perfect adjustment** of the stroke (18 mm) and the working power (24.000 N) combined with adapted clamping jaws to the grooves of the mandrel. This guarantees powerful handling with reduced abrasion.

