




Blind Rivet Nut SSM

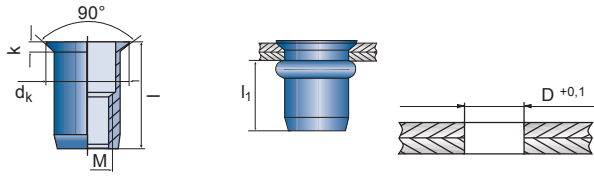

| M | | D | dk | I | k | l ₁ max. | No. | |
|-----------|-----------|-----|-----|------|-----|---------------------|----------------|-----|
| M4 | 1,5 – 3,5 | 6,0 | 8,3 | 11,5 | 1,5 | 8,0 | 10.853.040.350 | 500 |

QSt 32-3 [1.0303] 4 Nm 5200 N

| | | | | | | | | |
|-----------|-----------|-----|-----|------|-----|-----|----------------|-----|
| M5 | 1,5 – 4,0 | 7,0 | 9,3 | 13,0 | 1,5 | 9,0 | 10.853.050.400 | 500 |
| | 4,0 – 5,5 | | | 15,5 | | | 10.853.050.550 | |

QSt 32-3 [1.0303] 6 Nm 9500 N

| | | | | | | | | |
|-----------|-----------|-----|------|------|-----|------|----------------|-----|
| M6 | 1,5 – 4,5 | 9,0 | 11,3 | 16,0 | 1,5 | 11,0 | 10.853.060.450 | 500 |
| | 4,5 – 6,0 | | | 17,5 | | | 10.853.060.600 | |

QSt 32-3 [1.0303] 11 Nm 16500 N



Steel Countersunk Head Round Shank -open- SSM


| M | | D | dk | I | k | l ₁ max. | No. | |
|-----------|-----------|------|------|------|-----|---------------------|----------------|-----|
| M8 | 1,5 – 4,5 | 11,0 | 13,3 | 18,5 | 1,5 | 13,5 | 10.853.080.450 | 250 |
| | 4,5 – 6,0 | | | 20,0 | | | 10.853.080.600 | |

QSt 32-3 [1.0303] 24 Nm 23500 N

| | | | | | | | | |
|------------|-----------|------|------|------|-----|------|----------------|-----|
| M10 | 1,5 – 4,5 | 13,0 | 14,9 | 22,0 | 1,5 | 16,5 | 10.853.100.450 | 250 |
| | 4,5 – 6,0 | | | 25,0 | | | 10.853.100.600 | |
| | 6,0 – 9,0 | | | 28,0 | | | 10.853.100.900 | |

QSt 32-3 [1.0303] 50 Nm 37000 N

▶ For larger grip ranges take a look at the patented OPTO® multigrip blind rivet nut on the pages 68/69.

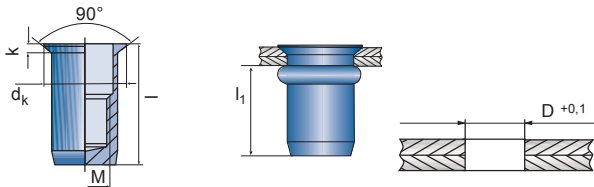

| M | | D | dk | I | k | l ₁ max. | No. | |
|-----------|-----------|-----|-----|------|-----|---------------------|----------------|-----|
| M5 | 1,5 – 4,0 | 7,0 | 9,3 | 19,5 | 1,5 | 15,5 | 10.857.050.400 | 500 |

QSt 32-3 [1.0303] 6 Nm 9500 N

| | | | | | | | | |
|-----------|-----------|-----|------|------|-----|------|----------------|-----|
| M6 | 1,5 – 4,5 | 9,0 | 11,3 | 23,5 | 1,5 | 18,5 | 10.857.060.450 | 500 |
| | 4,5 – 6,0 | | | 25,0 | | | 10.857.060.600 | |

QSt 32-3 [1.0303] 11 Nm 16500 N



Steel Countersunk Head Round Shank -closed- SSM-G


| M | | D | dk | I | k | l ₁ max. | No. | |
|-----------|-----------|------|------|------|-----|---------------------|----------------|-----|
| M8 | 1,5 – 4,5 | 11,0 | 13,3 | 28,0 | 1,5 | 23,0 | 10.857.080.450 | 250 |
| | 4,5 – 6,0 | | | 35,5 | | | 10.857.080.600 | |

QSt 32-3 [1.0303] 24 Nm 23500 N

| | | | | | | | | |
|------------|-----------|------|------|------|-----|------|----------------|-----|
| M10 | 1,5 – 3,0 | 13,0 | 14,9 | 32,5 | 1,5 | 28,5 | 10.857.100.300 | 250 |
|------------|-----------|------|------|------|-----|------|----------------|-----|

QSt 32-3 [1.0303] 50 Nm 37000 N

▼ No stock type item. Please ask for current inventory.

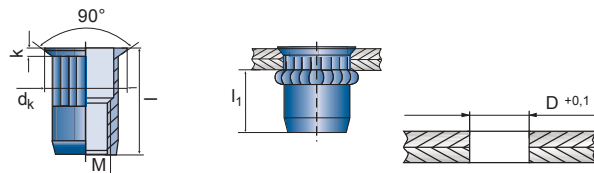

| M | | D | dk | I | k | l ₁ max. | Nr. | |
|-----------|-----------|-----|-----|------|-----|---------------------|----------------|-----|
| M4 | 1,5 – 3,5 | 6,0 | 8,3 | 11,5 | 1,5 | 8,0 | 10.845.040.350 | 500 |
| | 3,5 – 5,0 | | | 13,0 | | | 10.845.040.500 | |

QSt 32-3 [1.0303] 5000 N

| | | | | | | | | |
|-----------|-----------|-----|------|------|-----|-----|----------------|-----|
| M5 | 1,5 – 4,0 | 7,0 | 9,3 | 13,5 | 1,5 | 9,0 | 10.845.050.400 | 500 |
| | 4,0 – 6,0 | | 10,0 | 15,0 | | | 10.845.050.600 | |

QSt 32-3 [1.0303] 9000 N

| | | | | | | | | |
|-----------|-----------|-----|------|------|-----|------|----------------|-----|
| M6 | 1,5 – 4,5 | 9,0 | 11,3 | 16,0 | 1,5 | 11,0 | 10.845.060.450 | 500 |
| | 4,5 – 6,5 | | 12,0 | 19,0 | | | 10.845.060.650 | |

QSt 32-3 [1.0303] 13500 N



Steel Countersunk Head Round Shank -open- knurled SSM-R

| M | | D | dk | I | k | l ₁ max. | Nr. | |
|-----------|-----------|------|------|------|-----|---------------------|----------------|-----|
| M8 | 1,5 – 4,5 | 11,0 | 13,3 | 19,0 | 1,5 | 13,5 | 10.845.080.450 | 500 |
| | 3,5 – 6,5 | | | 14,0 | | | 21,0 | |

QSt 32-3 [1.0303] 15000 N

| | | | | | | | | |
|------------|-----------|------|------|------|-----|------|----------------|-----|
| M10 | 1,5 – 4,0 | 13,0 | 15,7 | 22,0 | 1,6 | 14,5 | 10.845.100.400 | 250 |
| | 3,5 – 6,5 | | | 25,0 | | | 10.845.100.650 | |

QSt 32-3 [1.0303] 37000 N

| | | | | | | | | |
|------------|-----------|------|------|------|-----|------|----------------|-----|
| M12 | 1,7 – 4,5 | 16,0 | 19,0 | 26,0 | 1,9 | 17,5 | 10.845.120.450 | 250 |
| | 4,0 – 7,5 | | | 29,0 | | | 10.845.120.750 | |

QSt 32-3 [1.0303] 56000 N