




## Steel Small Countersunk Head Round Shank -open- SSM-KLSK

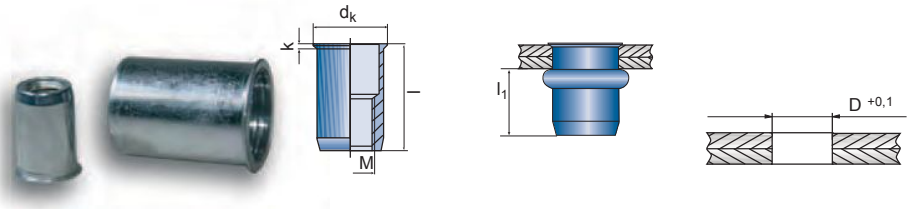

M		D	d <sub>k</sub>	l	k	l <sub>1</sub> max.	No.	
<b>M4</b>	0,3 – 2,0	6,0	7,0	10,5	0,5	6,0	10.841.040.200	500

QSt 32-3 [1.0303]      3 Nm      ↓ 6800 N

<b>M5</b>	0,5 – 3,0	7,0	8,0	11,5	0,5	6,3	10.841.050.300	500
-----------	-----------	-----	-----	------	-----	-----	----------------	-----

QSt 32-3 [1.0303]      5 Nm      ↓ 9000 N


M		D	d <sub>k</sub>	l	k	l <sub>1</sub> max.	No.	
<b>M6</b>	0,5 – 3,0	9,0	10,0	14,5	0,5	8,6	10.841.060.300	500

QSt 32-3 [1.0303]      10 Nm      ↓ 12000 N

<b>M8</b>	0,5 – 3,0	11,0	12,0	16,5	0,5	10,0	10.841.080.300	250
-----------	-----------	------	------	------	-----	------	----------------	-----

QSt 32-3 [1.0303]      20 Nm      ↓ 18000 N

## Steel Small Countersunk Head Round Shank -open- *knurled* SSM-R-KLSK

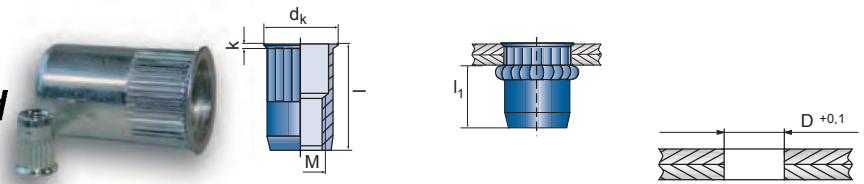

M		D	d <sub>k</sub>	l	k	l <sub>1</sub> max.	No.	
<b>M3</b>	0,3 – 1,5	5,0	6,0	8,5	0,4	5,5	10.843.030.150	500

QSt 32-3 [1.0303]      ↓ 4000 N

<b>M4</b>	0,5 – 2,0	6,0	7,0	10,0	0,4	8,0	10.843.040.200	500
-----------	-----------	-----	-----	------	-----	-----	----------------	-----

QSt 32-3 [1.0303]      ↓ 6500 N

<b>M5</b>	0,5 – 3,0	7,0	8,0	12,0	0,5	9,0	10.843.050.300	500
	13,0			10.843.050.450				

QSt 32-3 [1.0303]      ↓ 8000 N

M		D	d <sub>k</sub>	l	k	l <sub>1</sub> max.	No.	
<b>M6</b>	0,5 – 3,0	9,0	10,0	14,5	0,5	14,5	10.843.060.300	500
	17,5			10.843.060.600				

QSt 32-3 [1.0303]      ↓ 15000 N

<b>M8</b>	0,7 – 4,0	11,0	12,0	16,0	0,5	16,0	10.843.080.400	500
	19,5			10.843.080.600				

QSt 32-3 [1.0303]      ↓ 17000 N

<b>M10</b>	1,0 – 4,5	13,0	14,0	21,5	0,5	13,3	10.843.100.450	250
	23,0			10.843.100.600				

QSt 32-3 [1.0303]      ↓ 37000 N

<b>M12</b>	1,0 – 4,0	16,0	17,0	24,0	0,6	16,0	10.843.120.400	250
------------	-----------	------	------	------	-----	------	----------------	-----

QSt 32-3 [1.0303]      ↓ 54000 N

► Please note our manifold range of assortments and small packs on pages 104/105 and 106-108!

